SEO-6





SEO-6 - is a 2-way pendant loudspeaker featuring a 6.5” driver combination with a coaxially mounted 1” soft dome tweeter. The 2 way combination with a high-quality polypropylene enclosure and acoustic engineering craftsmanship guarantees premium performance for demanding applications.

A continuous power handling of 40 Watt (RMS) and maximum power handling of 80 Watt is achieved. Connections are made through a terminal block connector behind the rear cover with a power tap 100V line transformer with tappings for 40W, 20W, 10W, 5W and a 8 Ohm connection.

Mounting the speaker is done through a connection cable with two integrated steel cores for suspending with an additional drop safety. Fixation is made through two snap-hooks on one end and a dual fixation on the other end. Rear cover of the speaker can be placed after installation and hides the connection and suspension on the speaker end.

Specification:

SKU	**SEO-6**
Type	Pendant Speakers
Rated Power	40W at 8Ohm/100V
Input Options	8Ohm / 100V
Transformer Taps	5W / 10W / 20W / 40W / 8Ohm
Ways	2
Drivers	6.5” low-middle range woofer
	1 high frequency tweeter
Effective frequency range	70 - 20KHz
Sound Pressure Level	107dB
Sensitivity	91dB, measured at 1W/m
Coverage angle	97º Conical
Enclosure material	ABS reinforced with fibreglass
Grille	Steel
Finished colour	White (SEO-6W), Black (SEO-6B)
Waterproof degree	IP55
Dimension (ØxD)	203×285mm
Weight	3.2kg

Pendant Speakers

SEO-6

FREQUENCY RESPONSE

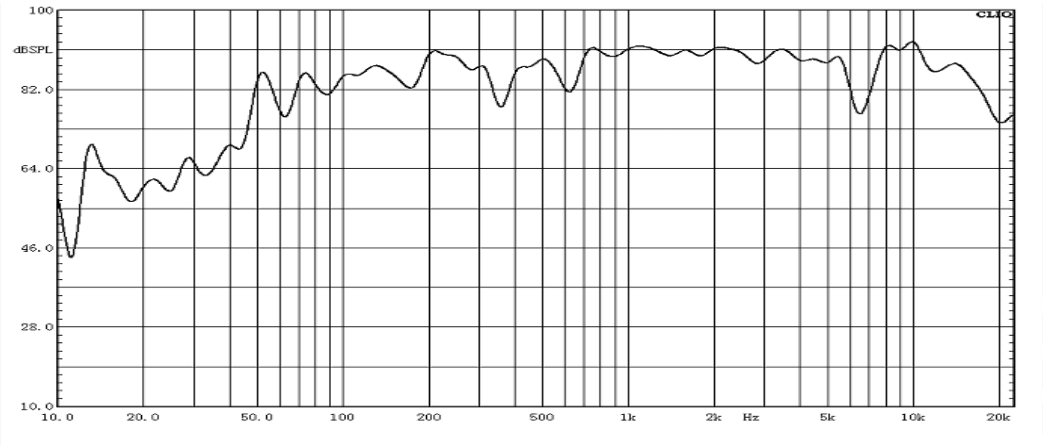

Horizontal Polars:

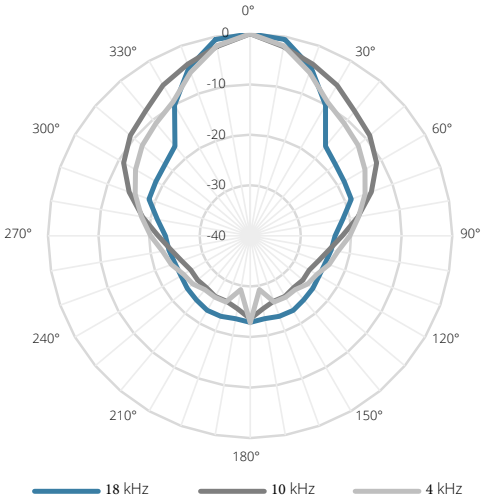

Vertical Polars:

