ALO-6



ALO-6 is an all-weather 2-way wall-mounted speaker system with a 6.5'' low-middle range woofer and a 1'' high frequency tweeter. Has an effective power output of up to 40W RMS. Equipped with a 100-volt linear transformer with power taps of 5, 10, 20 and 40 W. Case color black or white

- Connection in 8 Ohm, 70 and 100 V mode
- Rotary control for changing operating modes and speaker power
- Durable aluminum grille protects speakers from dust and external damage
- Durable ABS plastic housing
- Mounting bracket included

SPL vs Freq

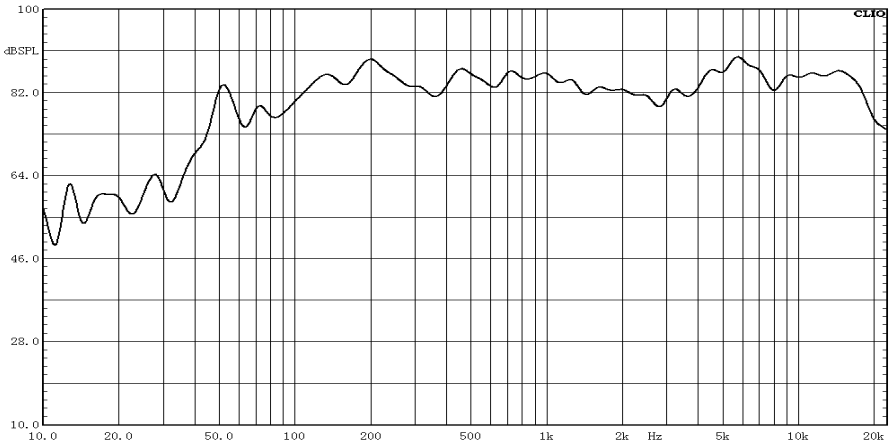

Specification:

SKU	**ALO-6**
Type	Wallmount Speaker
Rated Power	40W at 8Ohm/100V/70V
Maximum power	80W
Input Options	8Ohm / 100V/ 70V
Transformer Taps100V	5W / 10W / 20W / 40W
Ways	2
Drivers	6.5” low-middle range woofer 1” high frequency tweeter
Effective frequency range	100 - 20KHz
Sound Pressure Level	107dB
Sensitivity	91dB, measured at 1W/m
Enclosure material	ABS
Grille	Aluminum
Finished colour	White (ALO-6W), Black (ALO-6B)
Mounting bracket	Included
Dimension	215x190x285 mm (without bracket)
Weight	3.8kg