Wallmount Speakers

ALO-4



ALO-4 is an all-weather 2-way wall-mounted speaker system with a 4'' low-middle range woofer and a 0.75'' high frequency tweeter. Has an effective power output of up to 20W RMS. Equipped with a 100-volt linear transformer with power taps of 2.5, 5, 10 and 20 W. Case color black or white

- Connection in 8 Ohm, 70 and 100 V mode
- Rotary control for changing operating modes and speaker power
- Durable aluminum grille protects speakers from dust and external damage
- Durable ABS plastic housing
- Mounting bracket included

SPL vs Freq

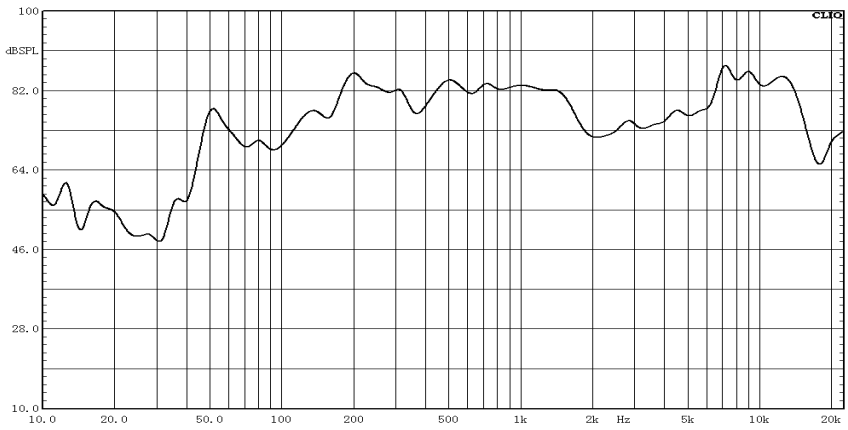

Specification:

SKU	**ALO-4**
Type	Wallmount Speaker
Rated Power	20W at 8Ohm/100V/70V
Maximum power	40W
Input Options	8Ohm / 100V/ 70V
Transformer Taps100V	2.5W / 5W / 10W / 20W
Ways	2
Drivers	4” low-middle range woofer 0,75” high frequency tweeter
Effective frequency range	100 - 20KHz
Sound Pressure Level	102dB
Sensitivity	89dB, measured at 1W/m
Enclosure material	ABS
Grille	Aluminum
Finished colour	White (ALO-4W), Black (ALO-4B)
Mounting bracket	Included
Dimension	160x150x225 mm (without bracket)
Weight	2,3kg